

HEICO-TEC® 膨胀销 EXPANSION BOLT

报价信息

Information on the quotation

询盘编号 Enquiry number: _____	日期 Date: _____	客户编号 Customer number: _____
公司名称 Company: _____		联系人姓名 Contact person: _____
地址 Address: _____		部门 Department: _____
		邮箱 E-Mail: _____
国别 Country: _____		联系电话 Phone: _____
报价截止日期 Quotation requested by: _____		最晚交期 Delivery until: _____

应用描述
Application description: _____

运行模式 Type of movement:

- | | | |
|---|---------------------------------------|---------------------------------------|
| <input type="checkbox"/> 旋转
Rotating | <input type="checkbox"/> 线性
Linear | <input type="checkbox"/> 静止
Static |
|---|---------------------------------------|---------------------------------------|

安装情况 Installation situation:

- | | | |
|--|--|--|
| <input type="checkbox"/> 横向安装
Horizontal installation | <input type="checkbox"/> 纵向安装
Vertical installation | <input type="checkbox"/> 架空安装
Overhead installation |
|--|--|--|

膨胀销类型 Expansion bolt type:

- | | | |
|--|--|--|
| <input type="checkbox"/> 1型膨胀销 / 无螺纹
Expansion bolt type 1 / threadless bores | <input type="checkbox"/> 2型膨胀销 / 盲孔
Expansion bolt type 2 / blind bores | <input type="checkbox"/> 3型膨胀销 / 通孔
Expansion bolt type 3 / through bores |
|--|--|--|

操作空间 Operability from:

- | | |
|---------------------------------------|--|
| <input type="checkbox"/> 单侧
1 Side | <input type="checkbox"/> 双侧
2 Sides |
|---------------------------------------|--|

其他要求 Additional requirements:

- | | |
|--|---|
| <input type="checkbox"/> 附加防松保护
Additional protection against automatic loosening | <input type="checkbox"/> 提高防腐保护要求
Increased requirement for corrosion protection |
|--|---|

请为每个应用或每个尺寸填写一张单独的数据表。对于其他安装情况或不同的几何形状，请随询盘表附上相应的简图或详图。孔的公差需要一张单独的尺寸表。如孔超出公差，建议一起加工成同样尺寸，那么孔在整个长度范围内的公差为H8以内。

Please use a separate data sheet for each application or for different main dimensions. For other installation situations or deviating geometries, please enclose a corresponding sketch or drawing section with your enquiry form.

A separate dimension sheet applies to the bore tolerances. If the holes are outside the tolerance, it is recommended that they are drilled out together to a standardised dimension, which is then within the H8 tolerance over the entire length of the hole.

请将填写完整的询盘表和您的简图或技术图纸发给info@heico-group.cn。
HEICO高素质的销售团队将立即联系您，向您提供具有吸引力的方案。

Please send the completed enquiry form with your sketches or technical drawings to info@heico-group.cn.
Our qualified HEICO sales team will contact you promptly and send you an attractive offer.

HEICO-TEC® 膨胀销 EXPANSION BOLT

技术数据

Technical data:

膨胀销详情 Details of the expansion bolt		
孔径 Hole-Ø [mm]	db	
节径 Pitch-Ø [mm]	TK	
数量 Numbers	z	

旋转运动 Rotating movement	
法兰功率 Flange power	
转速 Rotation speed [min-1]	
扭矩 Torque [Nm]	
弯矩 Bending torque [Nm]	
纵向拉力 Longitudinal tensile force [kN]	


静止和线性运动 Static and linear movement	
剪力 (横向) Shear force (across) [kN]	
驱动力 (纵向) Tractive force (lengthwise) [kN]	

膨胀销详情 Details of the expansion bolt		
宽 Width [mm]	T1	
外径 Outer-Ø [mm]	F1	
内径 Inner-Ø [mm]	D1	
圆角 Radius [mm]	R1	
材质 Material		
强度 Strength [MPa]		

后侧法兰 Flange on rear		
宽 Width [mm]	T2	
外径 Outer-Ø [mm]	F2	
内径 Inner-Ø [mm]	D2	
圆角 Radius [mm]	R2	
材质 Material		
强度 Strength [MPa]		


1型膨胀销 / 无螺纹

Expansion bolt type 1 / threadless bores

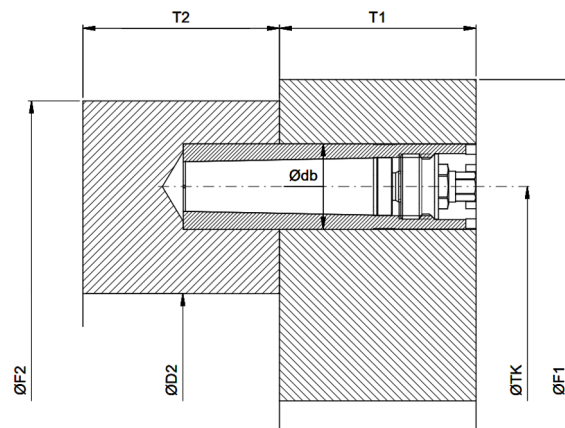

2型膨胀销 / 盲孔

Expansion bolt type 2 / blind bores

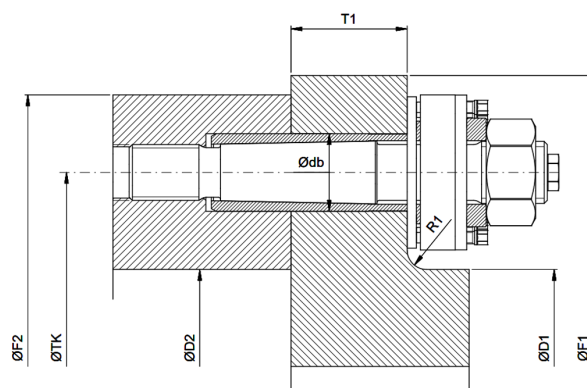

3型膨胀销 / 通孔

Expansion bolt type 3 / through bores

